GLACIER BAY

Item# 237 960
Model# TB-TSTDC-01

USE AND CARE GUIDE

UNIVERSAL ELEVATED TOILET SEAT

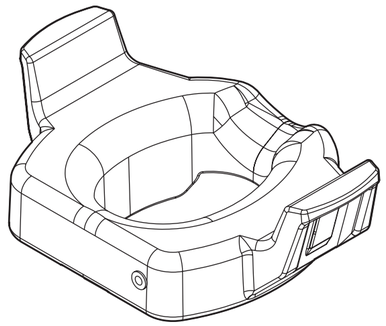

THANK YOU

We appreciate the trust and confidence you have placed in Glacier Bay through the purchase of this Universal Elevated Toilet Seat. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Glacier Bay!

Warranty

WHAT IS COVERED

This warrants the original purchaser that this product will be free of manufacturing defects under normal domestic use for the life of the product beginning from the original date of purchase. Present warranty does not extend to anyone except the first purchaser at retail. Also, an original sales receipt must be obtained in order for the warranty to be valid. To obtain warranty service, contact the retailer from which the product was purchased.

WHAT IS NOT COVERED

Present warranty excludes damages resulting in whole or in part from installation error, product abuse, misuse, neglect, any alterations to products, improper maintenance, abrasives, corrosion and / or accidents, whether caused by a professional or anyone else.

Limited Life Time Warranty does not apply to products used in or used for industrial, commercial, or business environment purposes. The Limited Warranty is valid for 1 year under these conditions.

Any and all accessories that are subject to any type of harsh abrasive, such as detergents or window cleaners, will not be covered under the warranty. The manufacturer is not responsible for any labor or shipping charges, or damages whatsoever incurred in whole or in part from installation, removal, re-installation, repair, or replacement of any product or part, as well as any incidental or consequential damages, expenses, losses, direct or indirect, arising from any cause whatsoever.

GLACIER BAY

Questions, problems, missing parts? Before returning to the store,
call Glacier Bay Customer Service
8 a.m. - 6 p.m., EST, Monday-Friday

1-877-527-0313

HOMEDEPOT.COM

Safety Information

DANGER: Severe injury can be caused from falling off the seat/chair due to tipping. While sitting, do not lean back on the seat or chair without proper balancing. Consult a health care professional for instructions specific to your needs before use.

WARNING: Do not use this product. If installation causes stress on any porcelain components of the toilet tank, rims or for any reason the product does not feel stable on your particular model toilet.

CAUTION: Before each use, check that the unit is fully engaged and that the latch lever is in the locked position.

CAUTION: Do not jump or stand on the seat.

CAUTION: Physically challenged users should be supervised or assisted whenever using this product.

IMPORTANT: This product has a maximum user weight capacity of 300 pounds (136 kg).

Pre-Installation

PLANNING INSTALLATION

NOTE: Make sure the mounting holes on the existing toilet are 5-1/2 in. center to center 5-1/2 in. (139.5 mm).

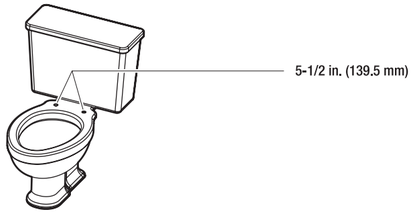

TOOLS REQUIRED

Screwdriver | Adjustable Wrench | Measuring Tape

PACKAGE CONTENTS

NOTE: Hardware not shown to actual size.

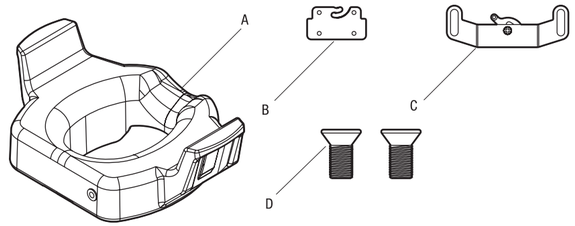

Part	Description
A	Safety elevated toilet seat
B	Latch receiver bracket

Part	Description
C	Locking latch bracket
D	Flathead screws (3/16 in. x 3/8 in.)

Installation

1 Removing the existing toilet seat

CAUTION: Please read these instructions completely before installation.

- ☐ Remove the existing toilet seat from the toilet and keep the screws.

2 Installing the latch receiver bracket

- ☐ Attach the latch receiver bracket (B) to the bottom of the universal toilet seat (A) with the flathead screws (D).

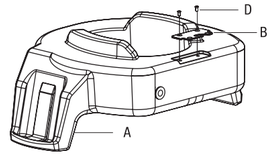

3 Installing the locking latch bracket

- ☐ Using the screws removed from Step 1, attach the locking latch bracket (C).



4 Installing the seat

- ☐ Gently place the universal raised toilet seat (A) over the toilet bowl with the latch receiver bracket (C) facing the tank. Insert the latch receiver bracket (C) into the locking latch lever bracket (B) and turn the lever to secure it in place.



Operation

1. Before each use, check that the unit is fully engaged and that the latch lever is in the locked position.

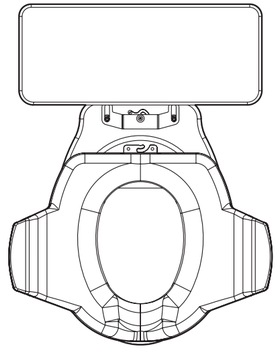

Care and Cleaning

- ☐ Unlock the latch lever and remove the universal elevated toilet seat.
- ☐ Clean using only water and mild detergent.

IMPORTANT: Do not use abrasive cleaners or bleach to clean the product.